

TP1000 S/D/XL Stand

Thank you for purchasing AVFI's TP1000 Stand.

This product is designed for mounting of either single, XL or dual TV's and weighing no more than 160lbs total.

Note: 2 people are required to assemble this Stand.




If you cannot understand these instructions or are concerned about safety of the installation

Contact a qualified contractor or contact AVFI at 1-877-834-3876.


Not all hardware supplied will be used depending on the manufacturer of your display/s.

Read these instructions start to finish before beginning installation.


Parts Included

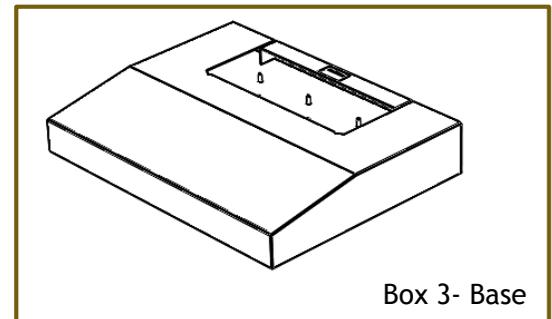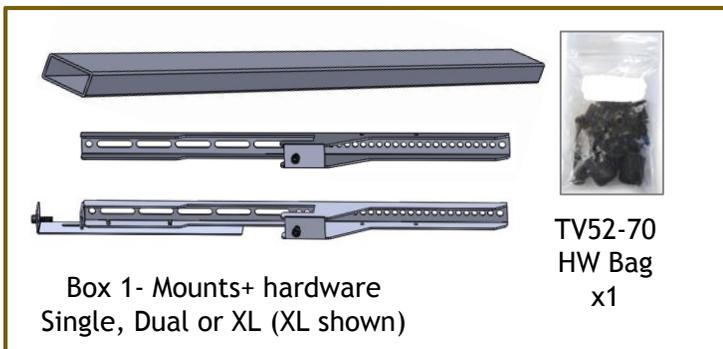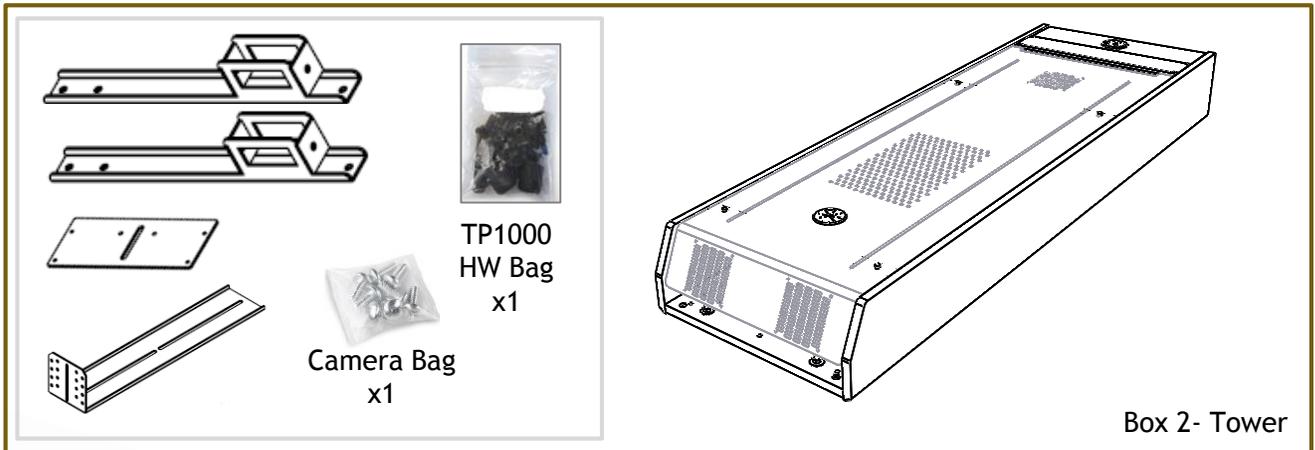

Tools Required Not Included



+ Philips
Screwdriver




Basic
Wrench or
Socket set



Allen keys
Are in hardware
HW bags

1

Open
Back panel.
Remove parts
inside.

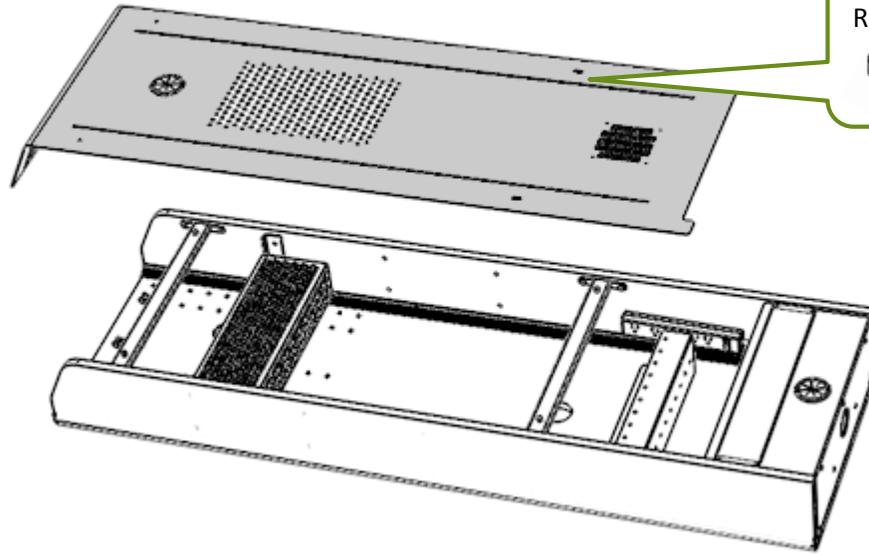

Remove Panel
M6 x4


Hex key found in
TV 52-70
HW Bag

2

A) Remove base rear metal panel
and separate shroud from base.

B) Attach Tower to Base.
2 people for this step. (heavy)


C) Reinstall shroud.

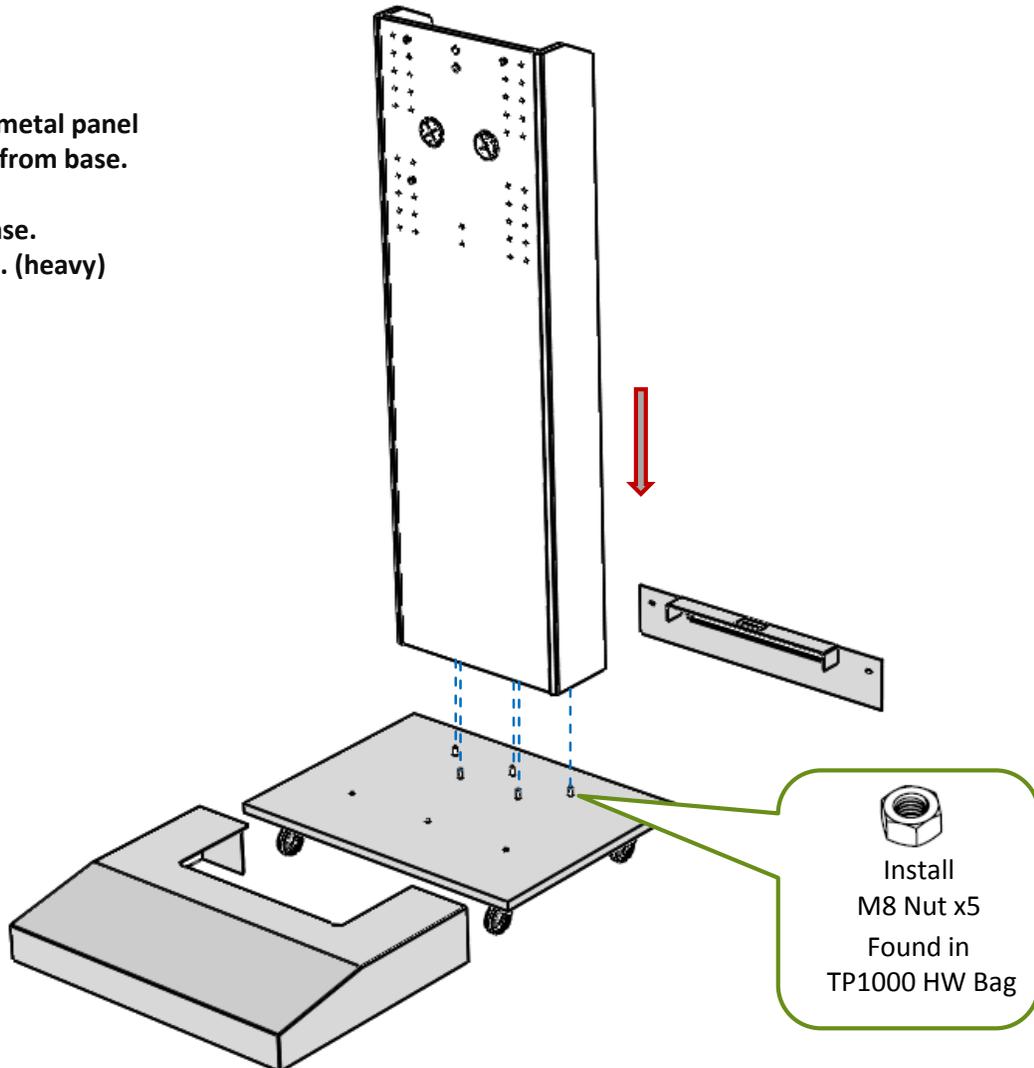

Install
M8 Nut x5
Found in
TP1000 HW Bag


3

Attach Tube Brackets.
Bracket can be installed upside
down if lower height is needed.

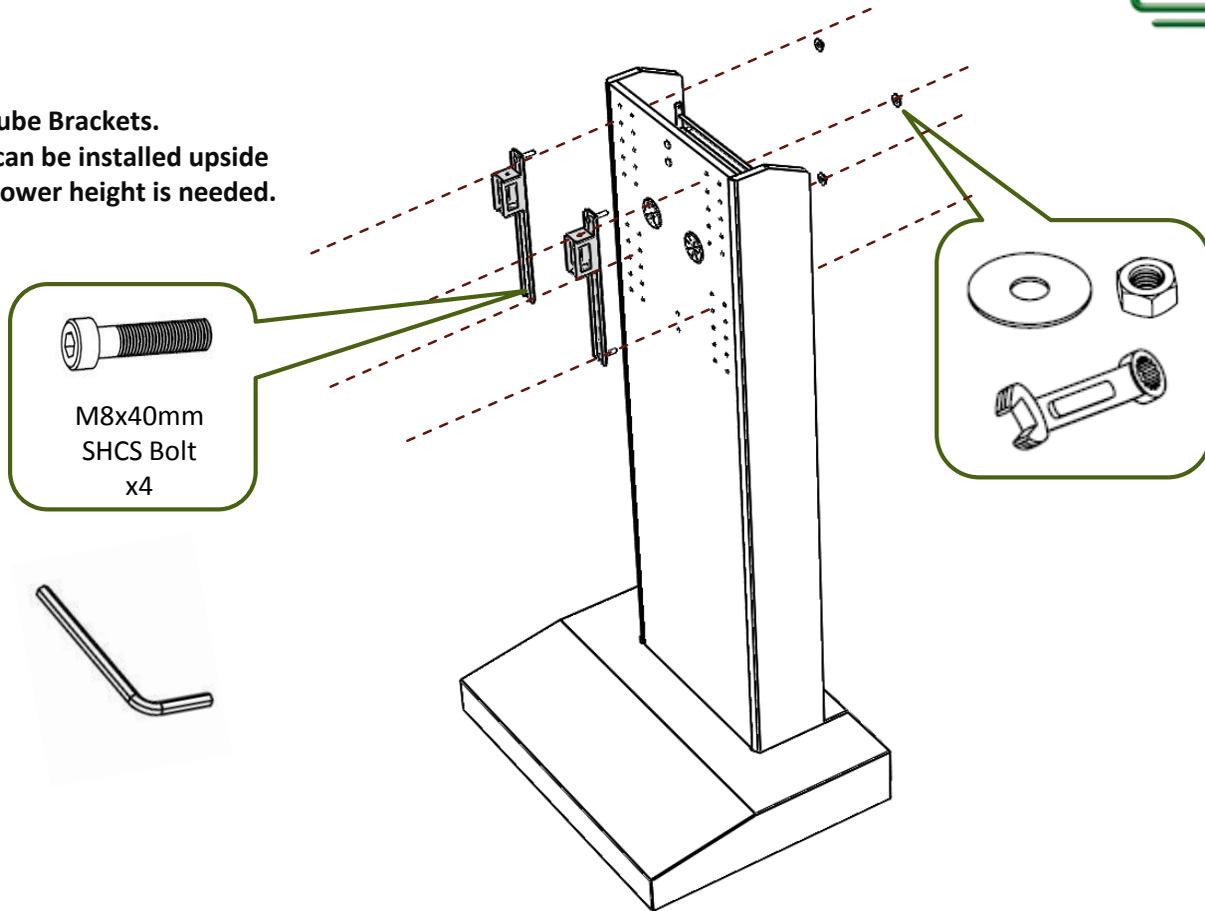

4

Insert Tube and Center.
Tighten Tube onto brackets.

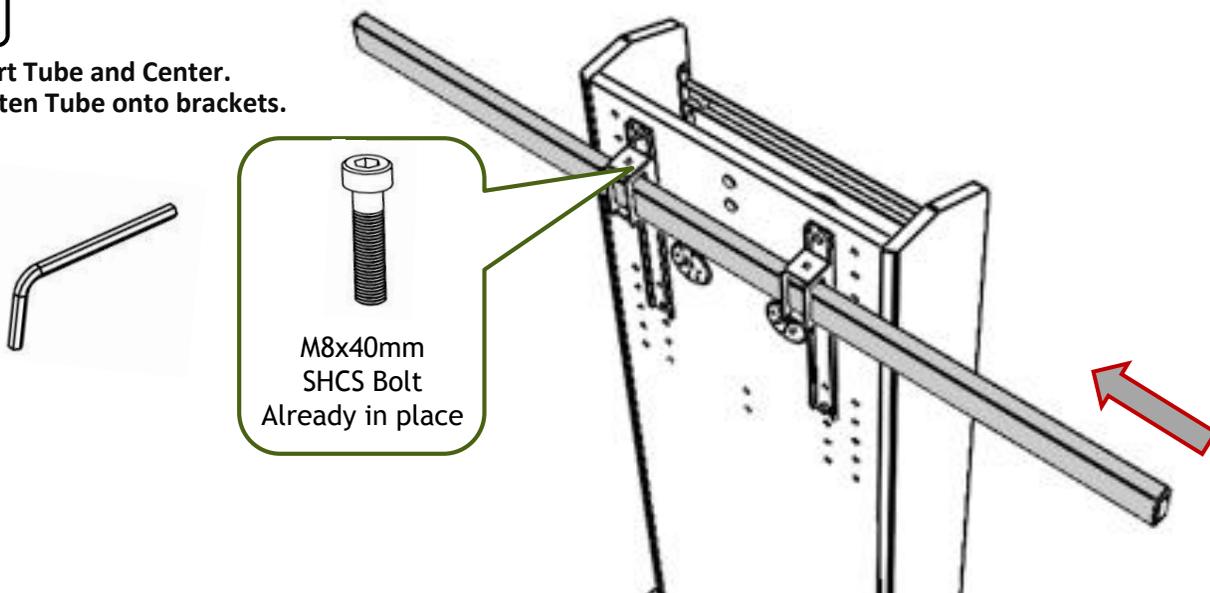


Step 5

Attach brackets to TV
Using Hardware found in:




TV 52-70
HW Bag

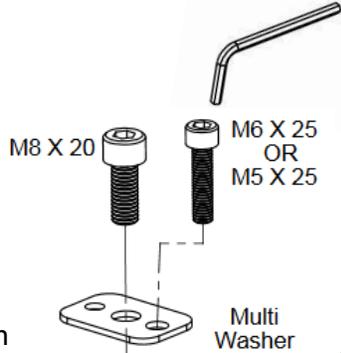


TV VESA patterns up to 1100mm x 650mm
Max TV Weight 200 lbs.

Remove bolt from rear of each bracket if VESA is less than 600mm wide.

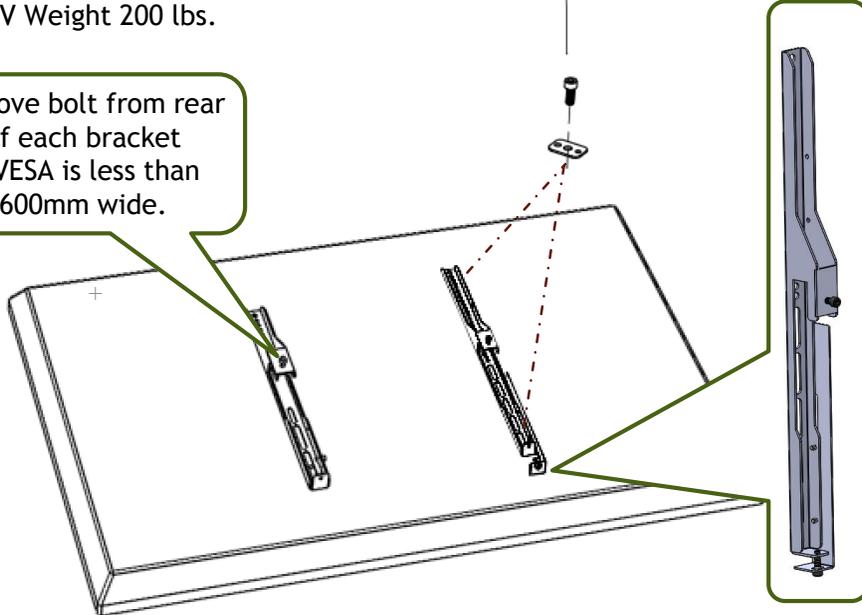

Uses Non-locking on left and locking bracket on right side.



Optional Spacer mounting

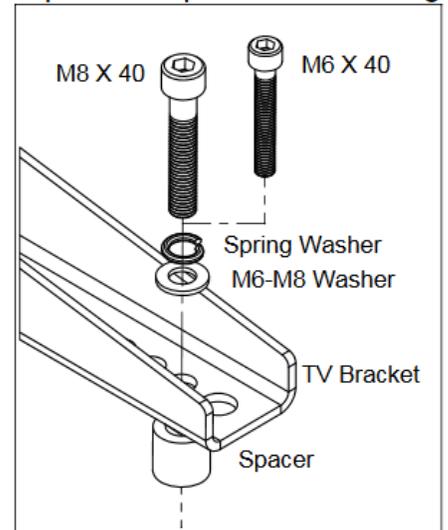

Spacer is used when the back of TV is not flat or the mount holes are sunk into the back of the TV. (Rarely used)

Step 6


Hang TV
And Center
Attach w lock
Bracket and rear
bolts if accessible.

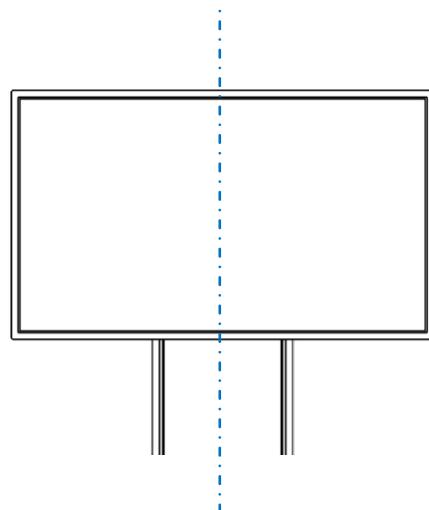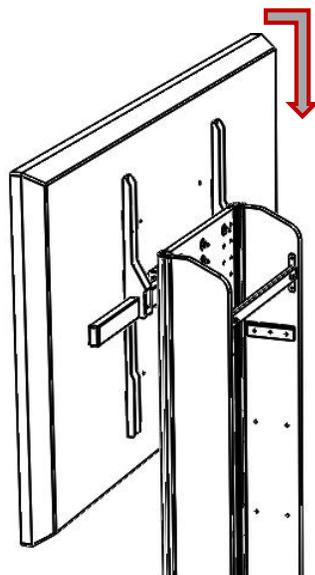



Step 7

Install Camera neck.

Can be installed on either side depending on TV depth.




Included Optional Wide Camera Plate

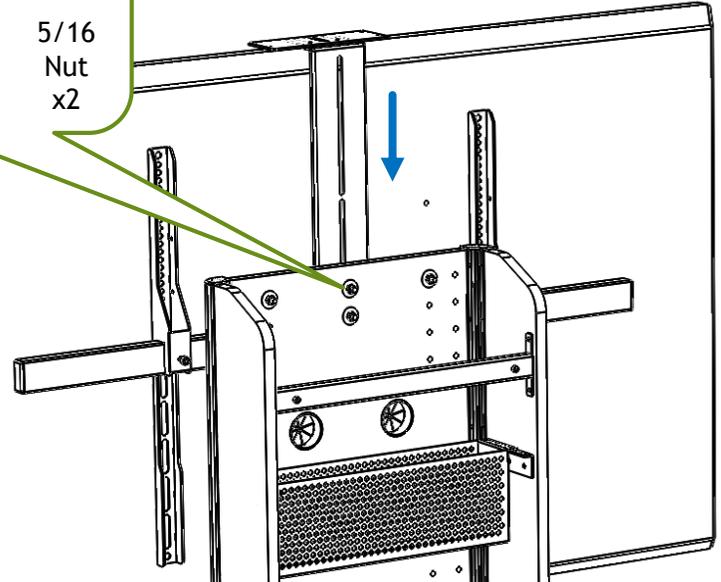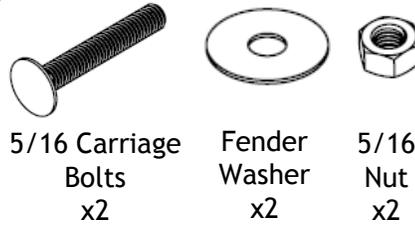

Step 8


Optional step.

Install rack mounted equipment, 2RU and 1U Knock out panels and /or accessories of choice.

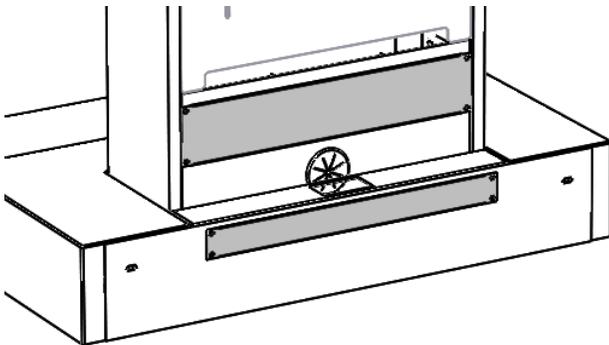

Rack mounted basket
Can be used for small Electronics and codecs with no mounting pattern. Use tie straps to secure items in basket.

Up to 3 sets of rack rails
can be installed.
(Includes 1 set)

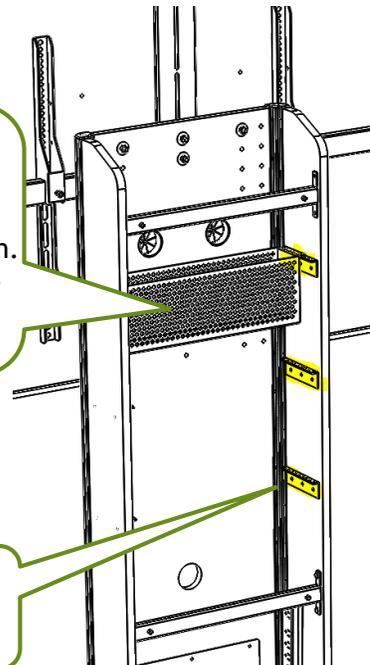

Step 9

Organize wiring and reinstall back panel. Finished.