

## TP800 S/D/XL Stand

Thank you for purchasing AVFI's TP800 Stand.

This product is designed for mounting of either single, XL or dual TV's and weighing no more than 160lbs total.

Some larger TV's will fit, Download TV manufacturers specs online,

**Note: 2 people are required to assemble this Stand.**


If you cannot understand these instructions or are concerned about safety of the installation

Contact a qualified contractor or contact AVFI at 1-877-834-3876.


Not all hardware supplied will be used depending on the manufacturer of your display/s.

Read these instructions start to finish before beginning installation.


### Parts Included

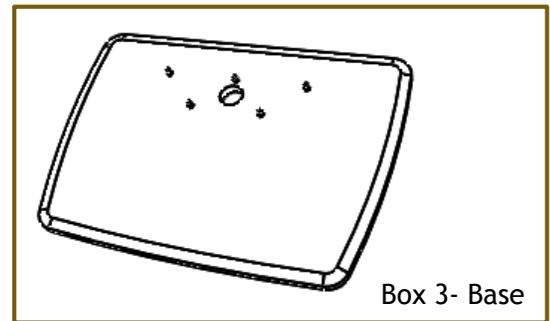

### Tools Required Not Included



+ Philips  
Screwdriver




Basic  
Wrench or  
Socket set



Allen keys  
Are in hardware  
HW bags

1

Open  
Back panel.  
Remove parts  
inside.

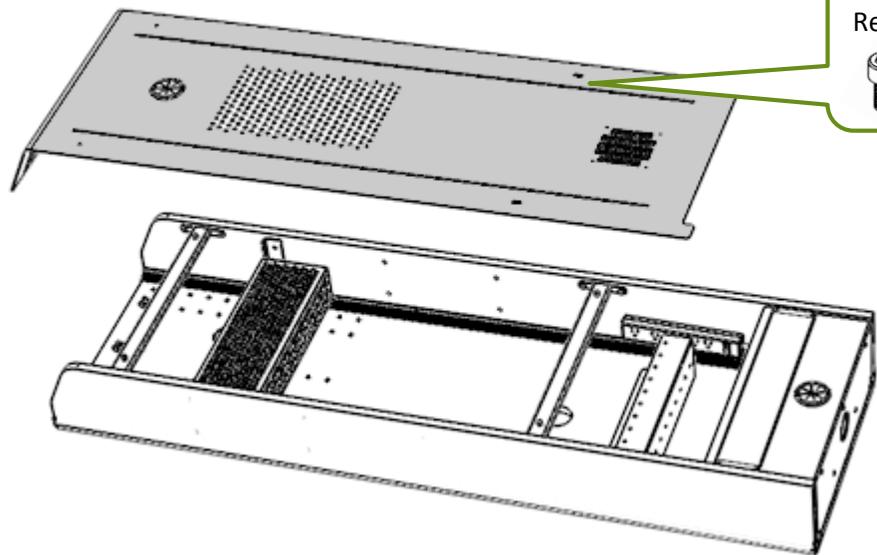


Remove Panel  
M6 x4

Hex key found in  
TV 52-70  
HW Bag

2


Attach Tower to Base.  
2 people for this step. (heavy)

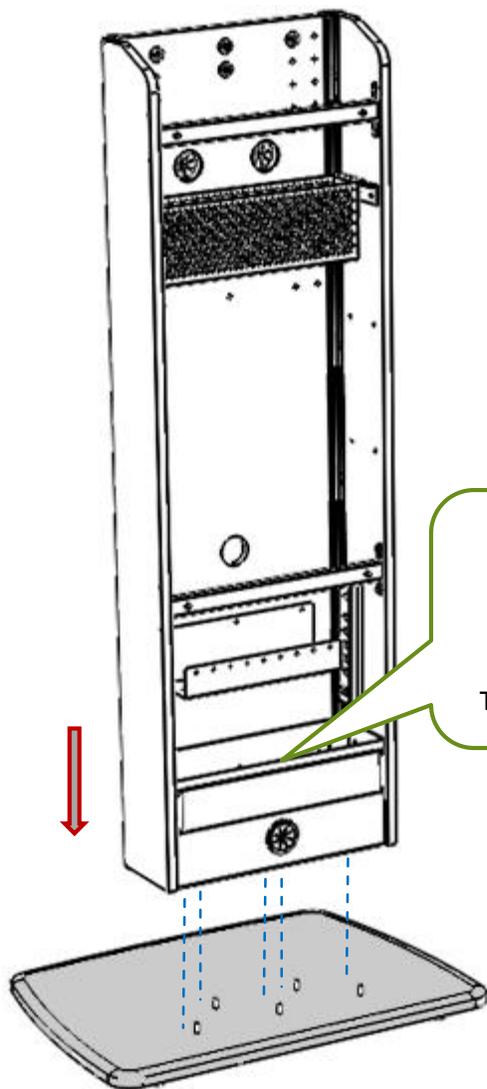

Install  
M8 Nut x5  
Found in  
TP1000 HW Bag


3

Attach Tube Brackets.  
Bracket can be installed upside  
down if lower height is needed.

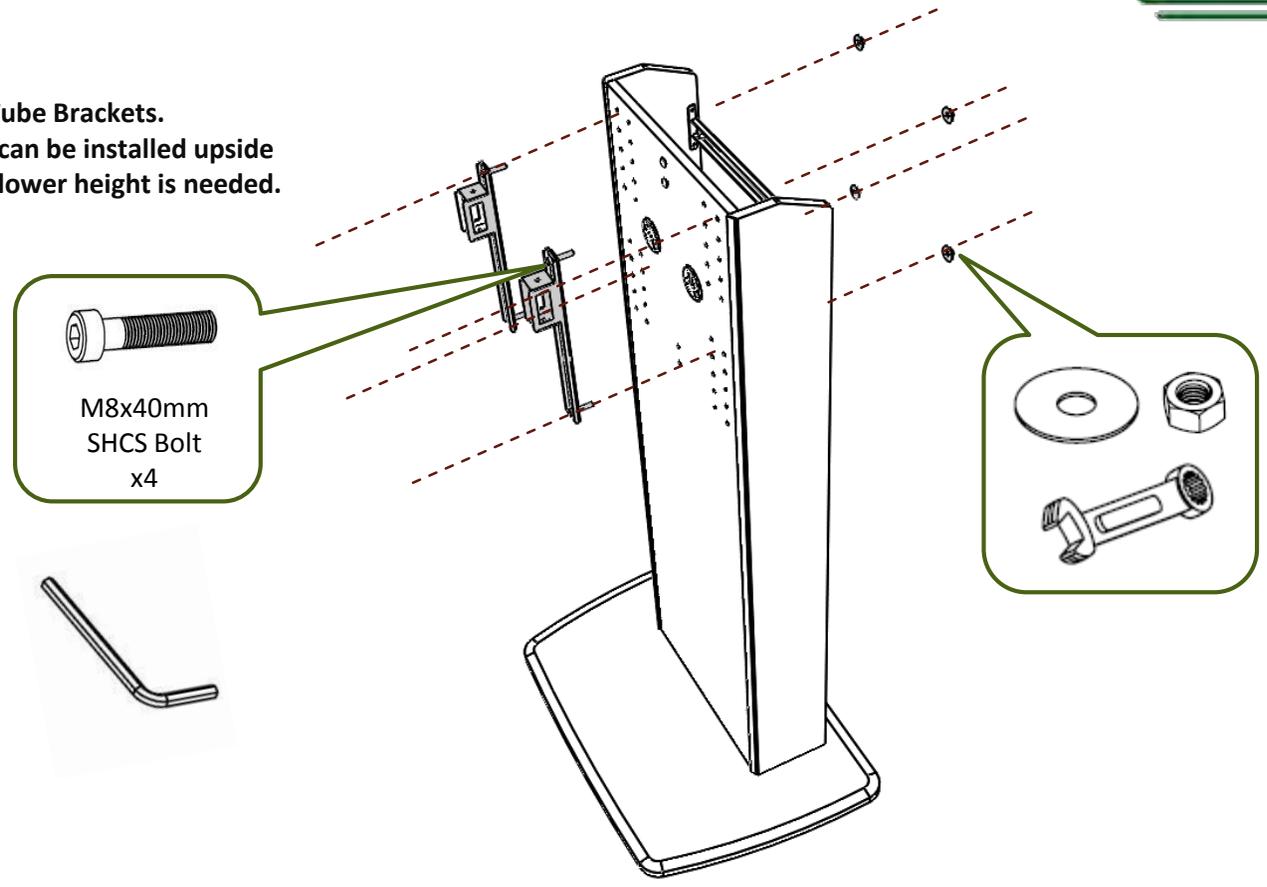

4

Insert Tube and Center.  
Tighten Tube onto brackets.

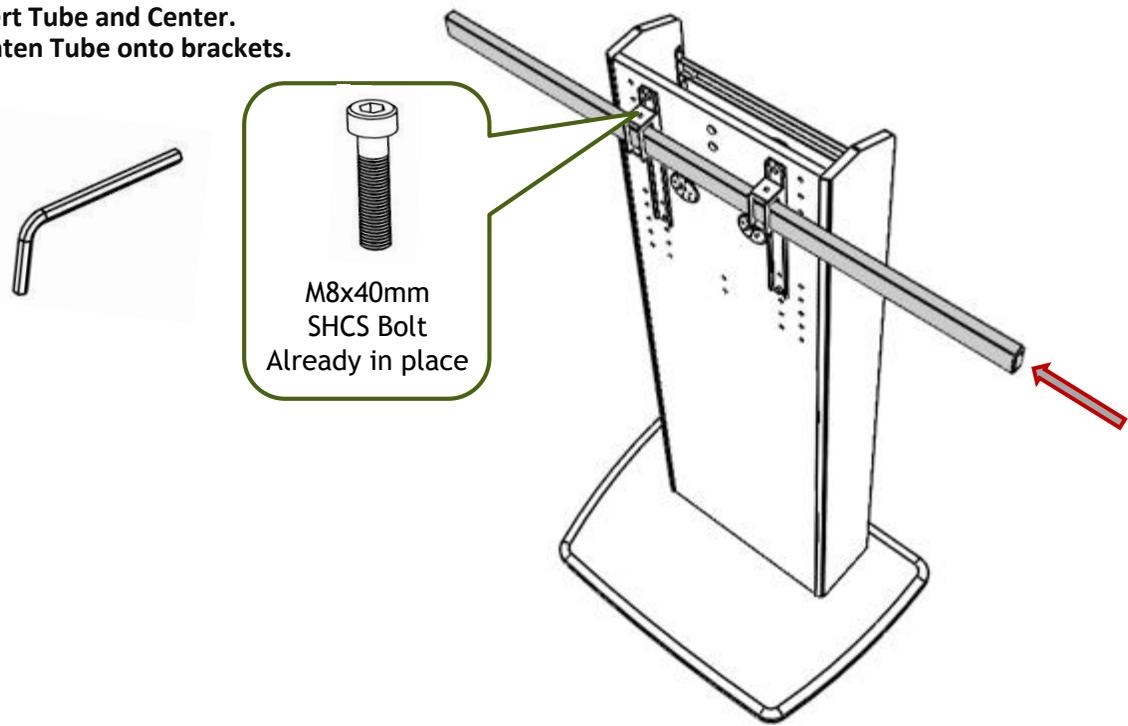


## Step 5

Attach brackets to TV  
Using Hardware found in:




TV 52-70  
HW Bag

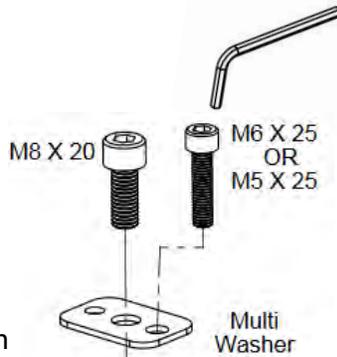


TV VESA patterns up to 1100mm x 650mm  
Max TV Weight 200 lbs.

Remove bolt from rear  
of each bracket  
If VESA is less than  
600mm wide.

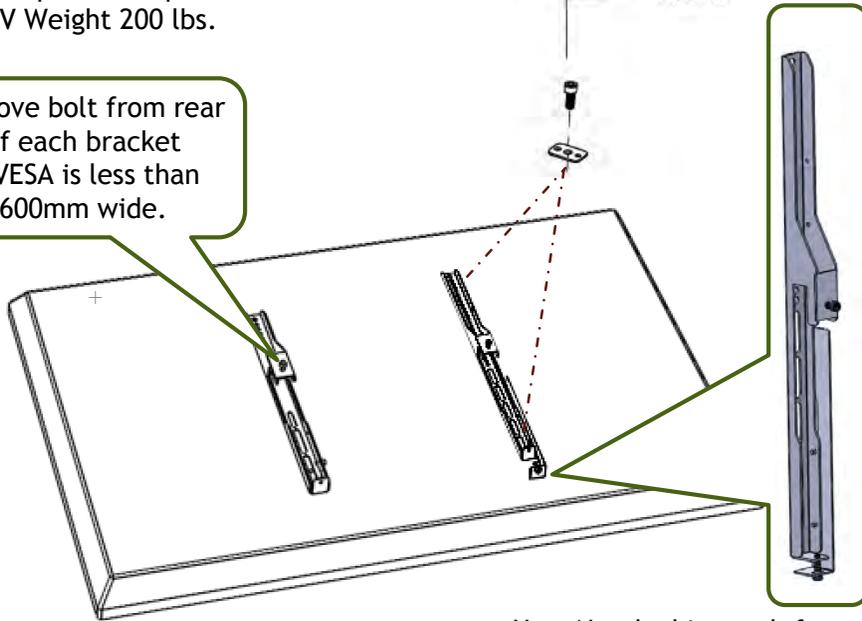

Uses Non-locking on left and  
locking bracket on right side.



### Optional Spacer mounting

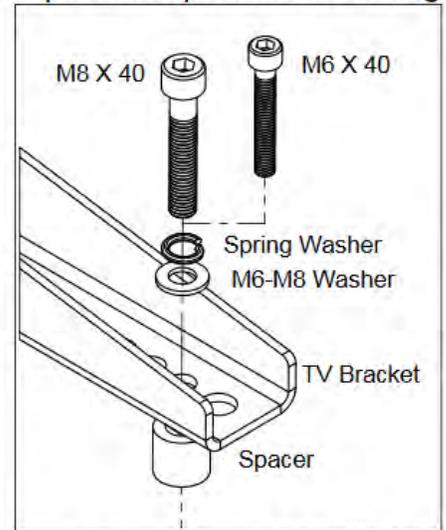

Spacer is used when the back of TV is  
not flat or the mount holes are sunk into  
the back of the TV. (Rarely used)

## Step 6




Hang TV  
And Center  
Attach w lock  
Bracket and rear  
bolts if accessible.

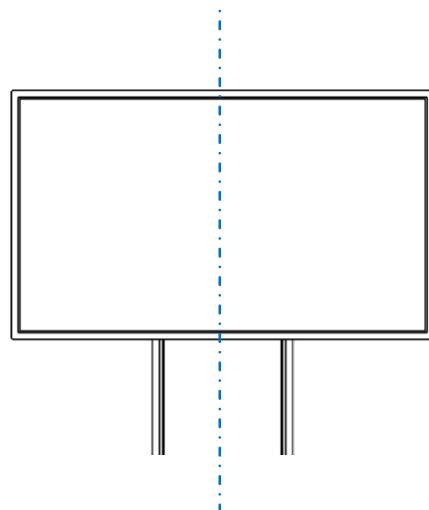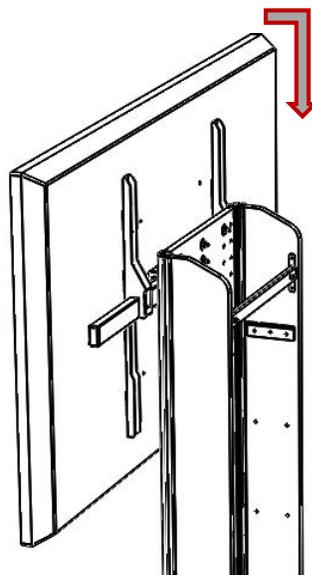

## Step 7

### Install Camera neck.

Can be installed on either side depending on TV depth.

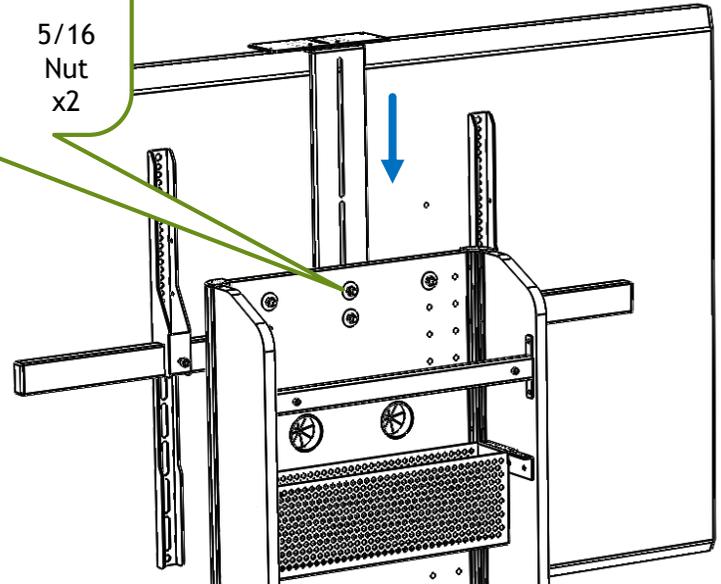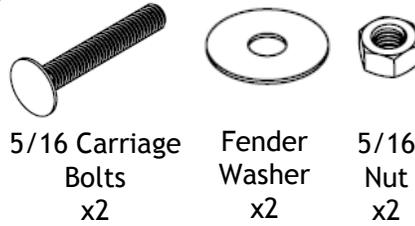

Included Optional Wide Camera Plate


## Step 8

### Optional step.

Install rack mounted equipment, 2RU Knock out panel and /or accessories of choice.



**Rack mounted basket**  
Can be used for small Electronics and codecs with no mounting pattern. Use tie straps to secure items in basket.

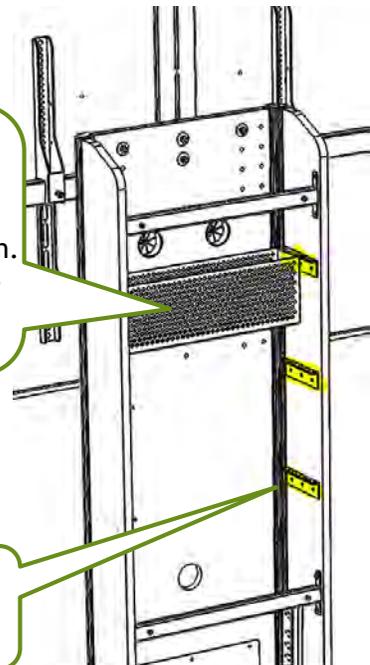

**Up to 3 sets of rack rails** can be installed. (Includes 1 set)



AVFI CUB3 option can replace grommet.

## Step 9

Organize wiring and reinstall back panel. Finished.